

# ECONOMAX™ D



## Electric Screen Printing Conveyor Dryer



### FEATURES

- Belt width 61 cm (24") & heat chamber length 114 cm (45")
- Patriot Belt™ with the SureTrak™ Roller System
- CoolSkin™ Technology leaves the dryer skin cool to the touch

Easy to own and economical to operate, Economax D is the ultimate affordable, space-saving infrared electric screen printing conveyor dryer. Not only does it have the highest production capacity in its class of conveyor dryers, it's also the most energy efficient. Entry and exit openings are adjustable, and heavy-duty thermal insulation prevents heat from migrating into the workplace, while CoolSkin™ technology leaves the dryer skin cool to the touch. Fast cure rates and high product throughput maximize conveyor dryer capacity and minimize per-unit cost.

Economax D cures with twin height-adjustable energy-efficient infrared panels. It features a 61 cm (24") Teflon®-coated fiberglass conveyor dryer belt, and can be equipped with a third radiant panel for increased dryer production capacity. A reliable, heavy-duty DC motor provides power, and Economax D's Proportional Integral Differential (PID) control allows the conveyor dryer to power up gradually to avoid maximum amperage loads during initial warmup. PID control also helps maintain even temperatures during production by phasing on and off rather than using the full-load/no-load approach. The control panel operates and displays temperature and conveyor belt speed. Process temperatures and set temperatures are controlled digitally. PID control responds

to ambient temperature changes by keeping the conveyor dryer chamber heat within 1° of target temperature at the thermocouple.

Economax D's reliable, heavy-duty, variable-speed DC motor powers M&R's Teflon-coated fiberglass Patriot Belt™ with the SureTrak™ roller system. The red silicone guide stitched along one edge of the Patriot Belt™ rides in grooves machined into the large anodized aluminum SureTrak™ rollers, keeping the belt where it belongs. It's the most precise dryer belt tracking available. An automatic shutdown sequence keeps the dryer's blower and belt running until the conveyor dryer chamber has cooled. This rugged, affordable dryer is designed for years of dependable performance. Combined with a manual press and a registration system like M&R's Tri-Loc, Economax D is a perfect electric screen printing conveyor dryer for small and startup screen printing shops and an ideal sampling dryer in midsize screen printing shops.

[www.mrprint.com](http://www.mrprint.com)  
[store.mrprint.com](http://store.mrprint.com)

# ECONOMAX™ D

## STANDARD FEATURES

### AIR HANDLING

- Adjustable air displacement and evacuation systems

### CERTIFICATION

- CE Certified: Built to specifications established by the European Committee for Standardization® (CE)
- UL Listed: Built to specifications established by Underwriters Laboratories® (UL)

### CONTROL CENTER

- Automatic shutdown sequence keeps the blower and belt running until the conveyor dryer chamber has cooled
- Digital keypad with digital display
- PID control allows the conveyor dryer to power up gradually to avoid maximum amperage loads during initial warmup
- PID control helps maintain even temperatures during screen printing production runs by phasing on and off rather than using the full-load/no-load approach

### CONVEYOR SYSTEM

- Driven by a reliable, heavy-duty, variable-speed DC motor
- The Patriot Belt™ is made of heat-resistant, Teflon®-coated fiberglass
- The red silicone guide stitched along one edge of the Patriot Belt™ rides in grooves machined into the large anodized aluminum SureTrak™ Rollers, providing the most precise belt tracking available

### DESIGN & CONSTRUCTION

- Adjustable entry/exit openings
- Air-cooled cabinet ensures long life for electrical components
- Circuit breakers allow easy reset
- Low-profile design makes it easier to see over the screen printing dryer
- On its side with legs folded, Economax D can fit through a 78 cm (31") doorway

### ENERGY EFFICIENCY

- CoolSkin™ technology leaves the conveyor dryer skin cool to the touch
- Economax D is the most energy-efficient electric screen printing conveyor dryer in its class
- Fast curing rates and high product throughput maximize conveyor dryer capacity and minimize per-unit cost
- Heavy-duty thermal insulation prevents heat from migrating from the conveyor dryer into the workplace
- PID control ensures consistency by keeping dryer chamber heat within 1° of target temperature at the thermocouple
- Process temperature and set temperature are displayed and controlled digitally

### HEAT CHAMBER


- Infrared radiant panel array
- Radiant panels are height adjustable

### PRODUCTIVITY

- Economax D has the highest production capacity of any electric screen printing conveyor dryer in its class

### WARRANTY, SERVICE AND SUPPORT

- 24-hour hotline is staffed 365 days a year
- Access to M&R's Training Center
- Parts & supplies are available online at [store.mrprint.com](http://store.mrprint.com)
- Two-year limited warranty

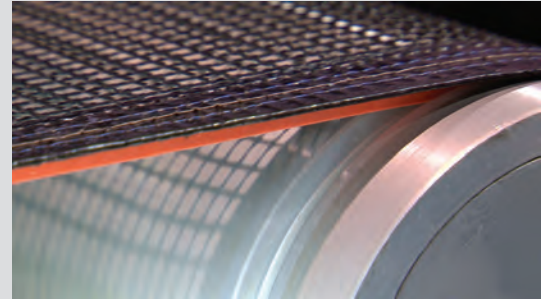

PATRIOT BELT™ CONVEYOR SYSTEM

## OPTIONS

### CONVEYOR SYSTEM

- Conveyor dryer infeed can be extended by 60 cm (24")

### DESIGN & CONSTRUCTION

- Short legs are available for tabletop use

### HEAT CHAMBER

- Third radiant panel increases electric conveyor dryer productivity

## SPECIFICATIONS

	Economax D-2	Economax D-3
Belt Width	61 cm (24")	61 cm (24")
Electrical Requirements <sup>1</sup>	208/230 V, 1 ph, 26/28 A, 50/60 Hz, 5 kW 208/230 V, 3 ph, 15/17 A, 50/60 Hz, 5 kW 380/415 V, 3 ph, 8/10 A, 50 Hz, 5 kW	208/230 V, 1 ph, 39/41 A, 50/60 Hz, 7.5 kW 208/230 V, 3 ph, 23/25 A, 50/60 Hz, 7.5 kW 380/415 V, 3 ph, 12/14 A, 50 Hz, 7.5 kW
Exhaust Blower System <sup>2,3</sup>	10 cm (4"): 3964 l/min (140 cfm) @ 3 mm (1/8")	10 cm (4"): 3964 l/min (140 cfm) @ 3 mm (1/8")
Heat Chamber Length	114 cm (45")	114 cm (45")
Overall Length	239 cm (94")	239 cm (94")
Overall Width	84 cm (33")	84 cm (33")
Radiant Panels	2	3
Shipping Weight	218 kg (480 lb)	227 kg (500 lb)
Standard Infeed Length	76 cm (30")	76 cm (30")
Standard Outfeed Length	48 cm (19")	48 cm (19")

<sup>1</sup> If incoming voltage differs from the voltage(s) listed in this brochure, calculate amperage accordingly. Other electrical configurations are available. Contact The M&R Companies for details.

<sup>2</sup> Measured at the exhaust discharge port

<sup>3</sup> Static pressure



**The M&R Companies**  
M&R • NUARC • AMSCOMATIC

**M&R Sales and Service, Inc. 440 Medinah Road, Roselle, Illinois 60172-2329 USA**  
**USA: 800-736-6431 / 630-858-6101 • Outside USA: +1-847-967-4461 • FAX: 630-858-6134**

M&R Printing Equipment, Inc. and its subsidiaries (hereinafter M&R), believe the information in this advertisement to be accurate at publication, though it does not purport to list all manufacturing and specification variations, nor does it assume liability resulting from incompleteness or inaccuracy. M&R reserves the right to change specifications without notice. M&R expressly disclaims any liability for damages, consequential or incidental, from purchase, installation, servicing, and/or use of any product/service based upon information herein. No warranties of merchantability or fitness for a particular purpose are made or are to be implied from the information herein. No information herein may be reproduced or used in any manner without the prior, express written consent of M&R in each case. Copyright 2016 M&R Printing Equipment, Inc. All rights reserved. 20160229